

# SOFT STONE SERIES

**SOFT STONE** is produced using hi-definition inkjet technology to recreate a crosscut stone look. Available in three colours and both a matt and grip finish.



**PRODUCT TYPE:** Glazed porcelain

**COLOURS:** White, Ivory and Grey

**SIZES:** 300x300mm, 300x600mm, 600x600mm  
and 600x1200mm  
Rectified Edges


**FINISHES/USAGE:** Matt and Grip/Wall and Floor

**AESTHETIC QUALITIES:** Natural stone look

**ORIGIN:** N/A

**TECHNICAL DATA:** P3 Pendulum slip rating (Matt)  
P4 Pendulum slip rating (Grip)  
More technical data on the last page


**VARIATION:**



V2


# SOFT STONE SERIES

## PRODUCT INFORMATION

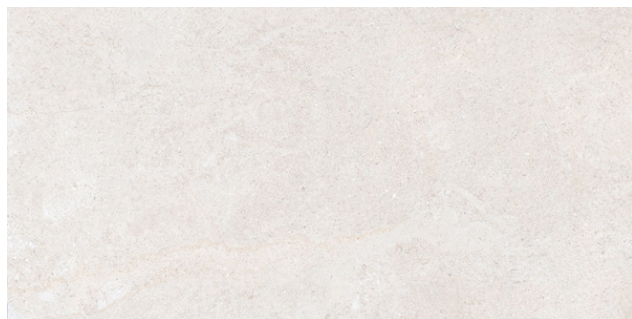


### White

Matt 300x300mm | 300x600mm | 600x600mm  
600x1200mm  
Grip 300x600mm

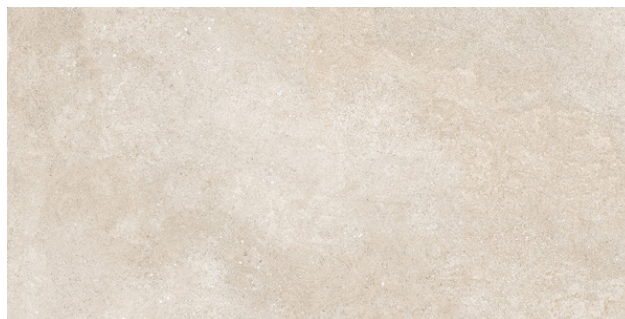

### Ivory

Matt 300x300mm | 300x600mm | 600x600mm  
600x1200mm  
Grip 300x600mm

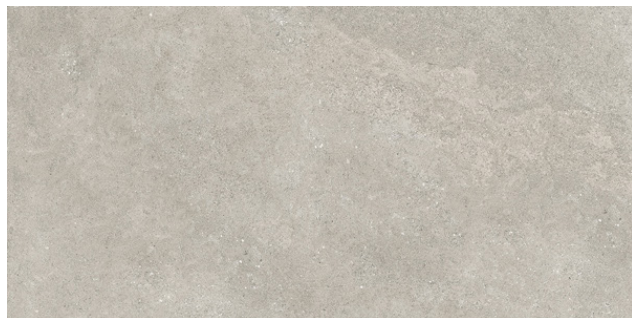

### Grey

Matt 300x300mm | 300x600mm | 600x600mm  
600x1200mm  
Grip 300x600mm



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

# SOFT STONE SERIES

## WHITE VARIATION



600x1200mm | 12 faces

600x600mm | 24 faces

# SOFT STONE SERIES

## IVORY VARIATION



600x1200mm | 12 faces

600x600mm | 24 faces

# SOFT STONE SERIES

## GREY VARIATION











600x1200mm | 12 faces

600x600mm | 24 faces

# SOFT STONE SERIES

## TECHNICAL DATA

	technical characteristics	test method	required values	result
	water absorption	ISO 10545-3	$\leq 0.5\%$	$\leq 0.4\%$
	modulus of rupture	ISO 10545-4	$\geq 35$ N/mm <sup>2</sup>	compliant
	surface quality	ISO 10545-2	Complies with the standards	$\geq 95\%$
	thermal shock resistance	ISO 10545-9	No sample must show visible defects	compliant
	deep abrasion resistance	ISO 10545-6	$\leq 175$ mm <sup>3</sup>	compliant
	chemical resistance	ISO 10545-13	Declared value	compliant
	resistance to frost	ISO 10545-12	Resistant	compliant
	staining resistance	ISO 10545-14	Minimum Class 3	compliant