



# Limestone



# PRODUCT COLOR SCHEME

Limestone tiles, with their natural, timeless look and subtle textures, add a touch of elegance and warmth to any space.

Available in 3 colours that ensures that the space feels refreshing and inviting every time you see it.

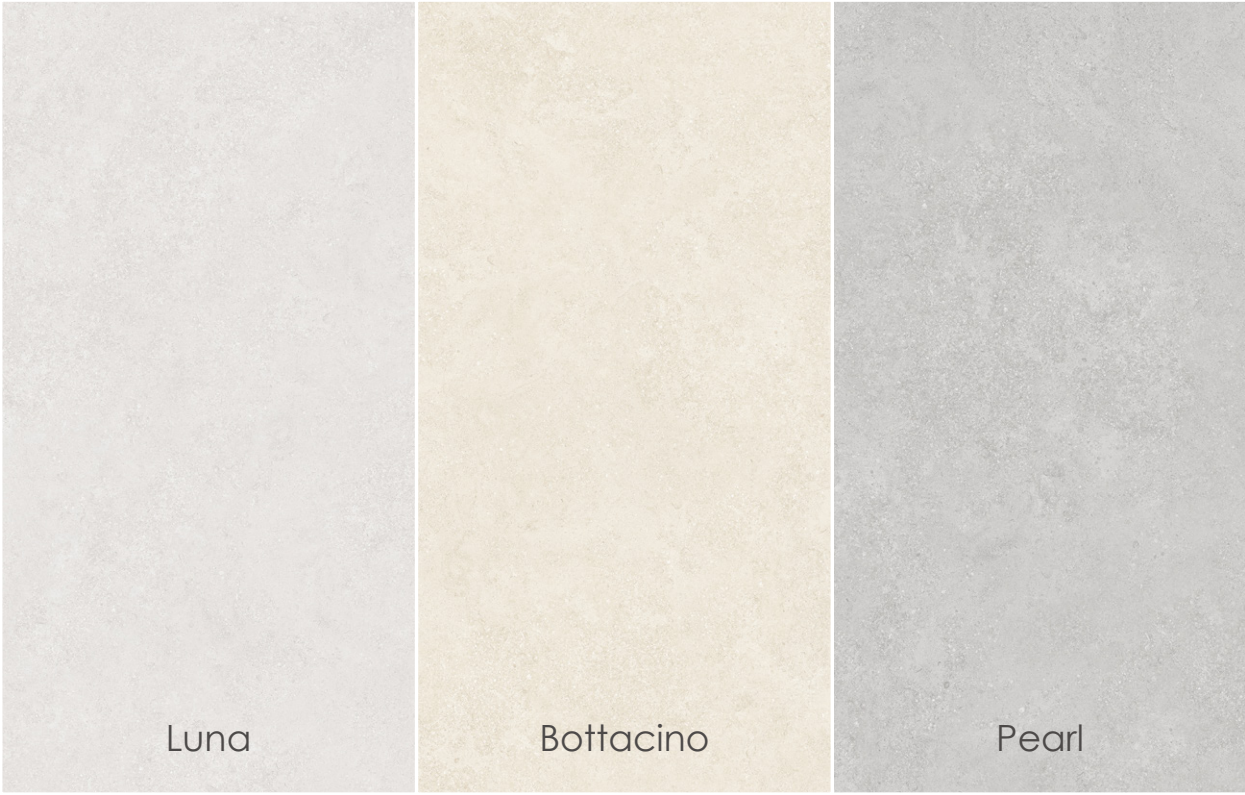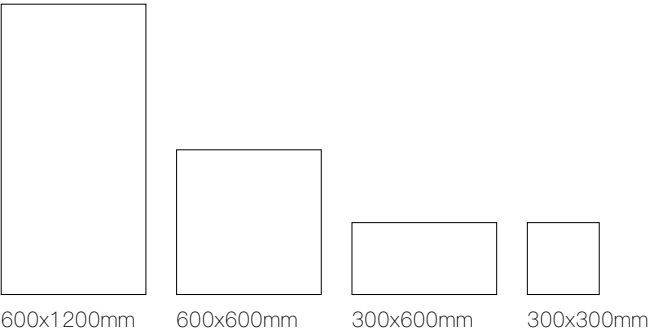



# Limestone Luna




**Size:**

300x300mm / 300x600mm  
600x600mm / 600x1200mm

**Finishes:**

Matt/External

**Thickness:**



9mm



600x1200mm

Matt




600x600mm

Matt/External



300x300mm

Matt

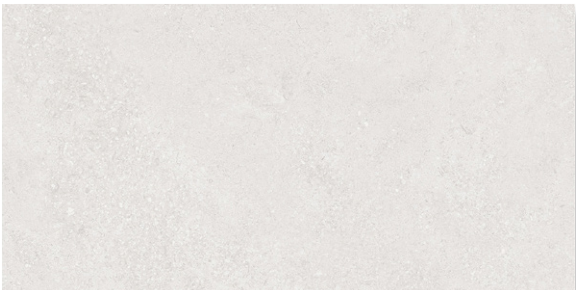

300x600mm

Matt/External


# 12

600x1200mm  
PATTERNS

**Size:**  
600x1200mm

**Finishes:**  
Matt



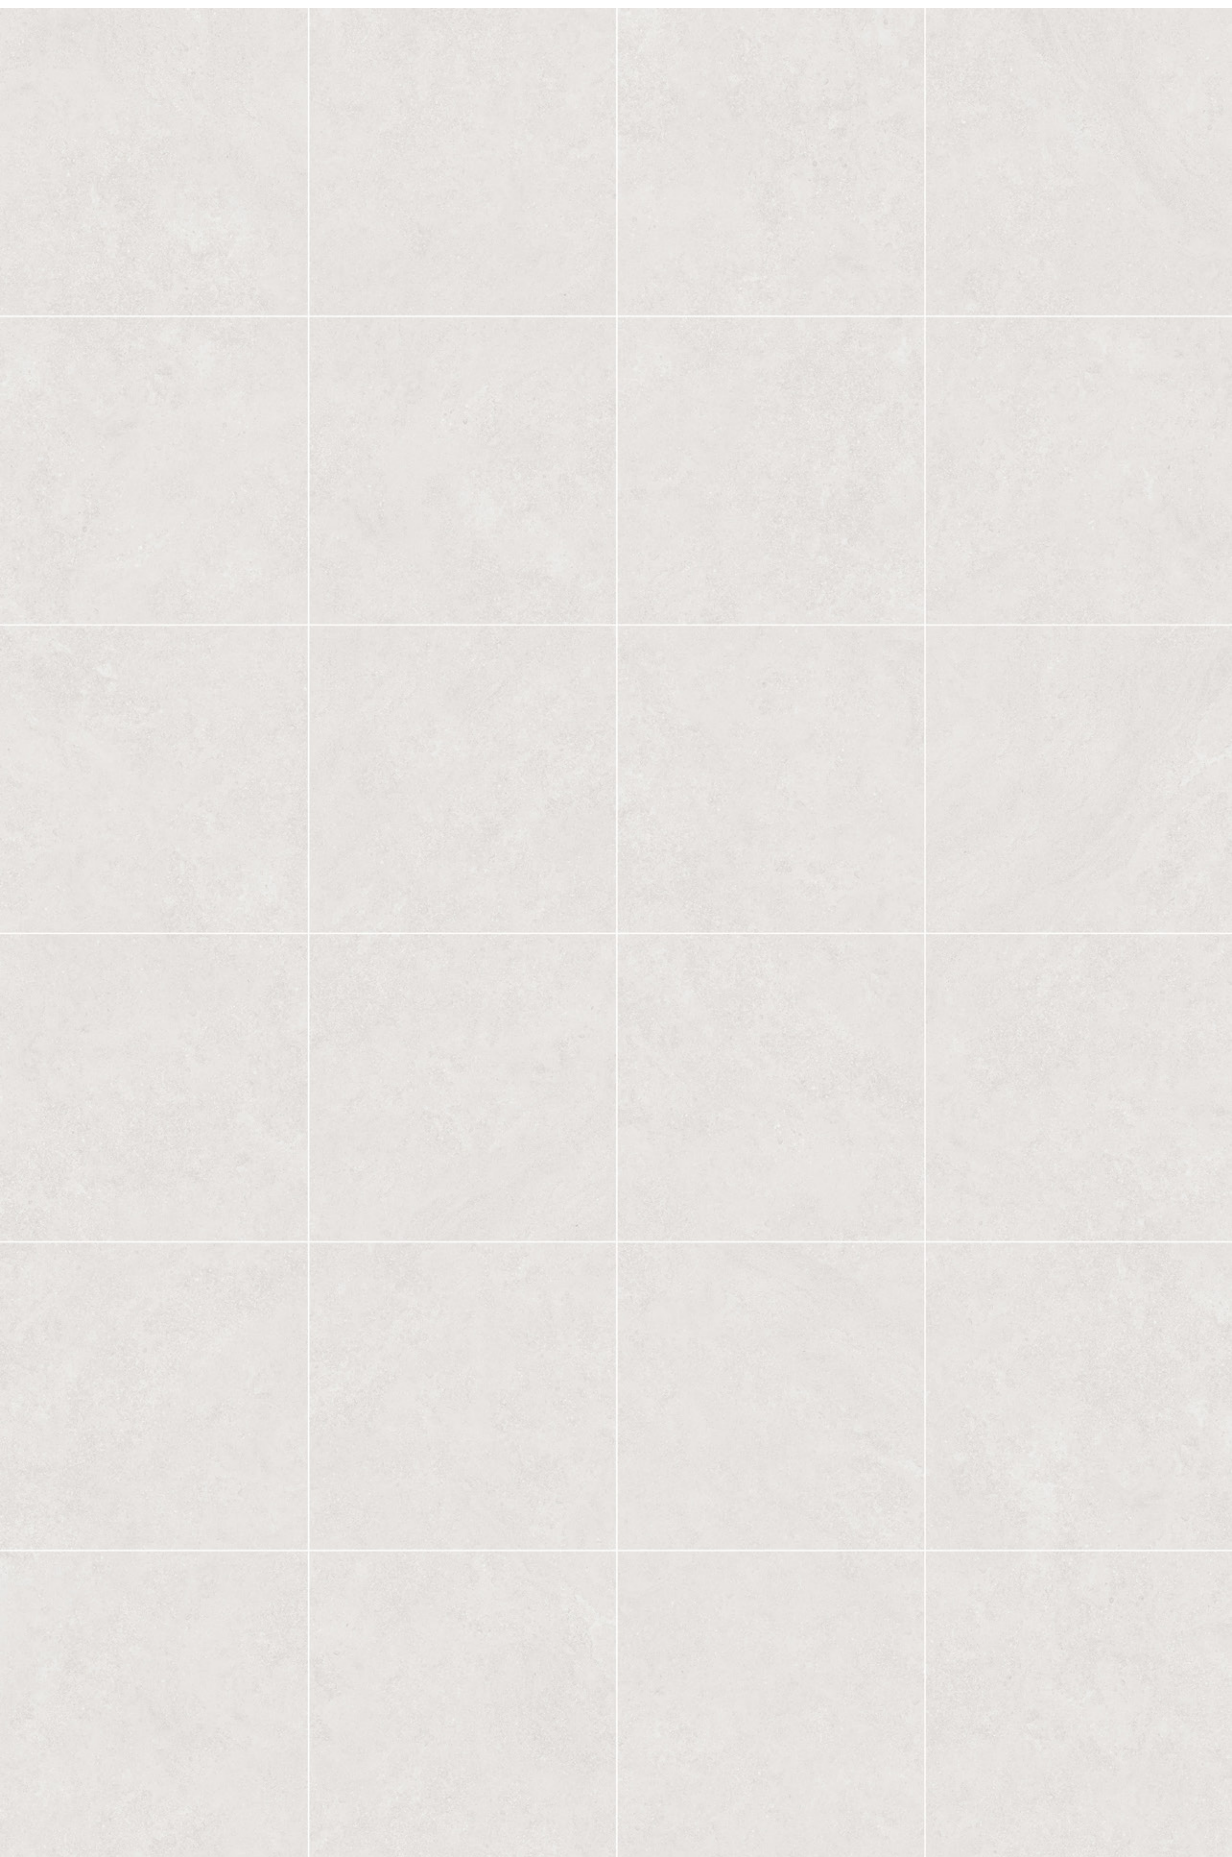

# 24

600x600mm  
PATTERNS

**Size:**  
600x600mm

**Finishes:**  
Matt/External




# Limestone Bottacino



**Size:**  
300x300mm / 300x600mm  
600x600mm / 600x1200mm

**Finishes:**  
Matt/External

**Thickness:**  
  
9mm



300x600mm      Matt/External




600x600mm      Matt/External



600x1200mm      Matt



300x300mm      Matt

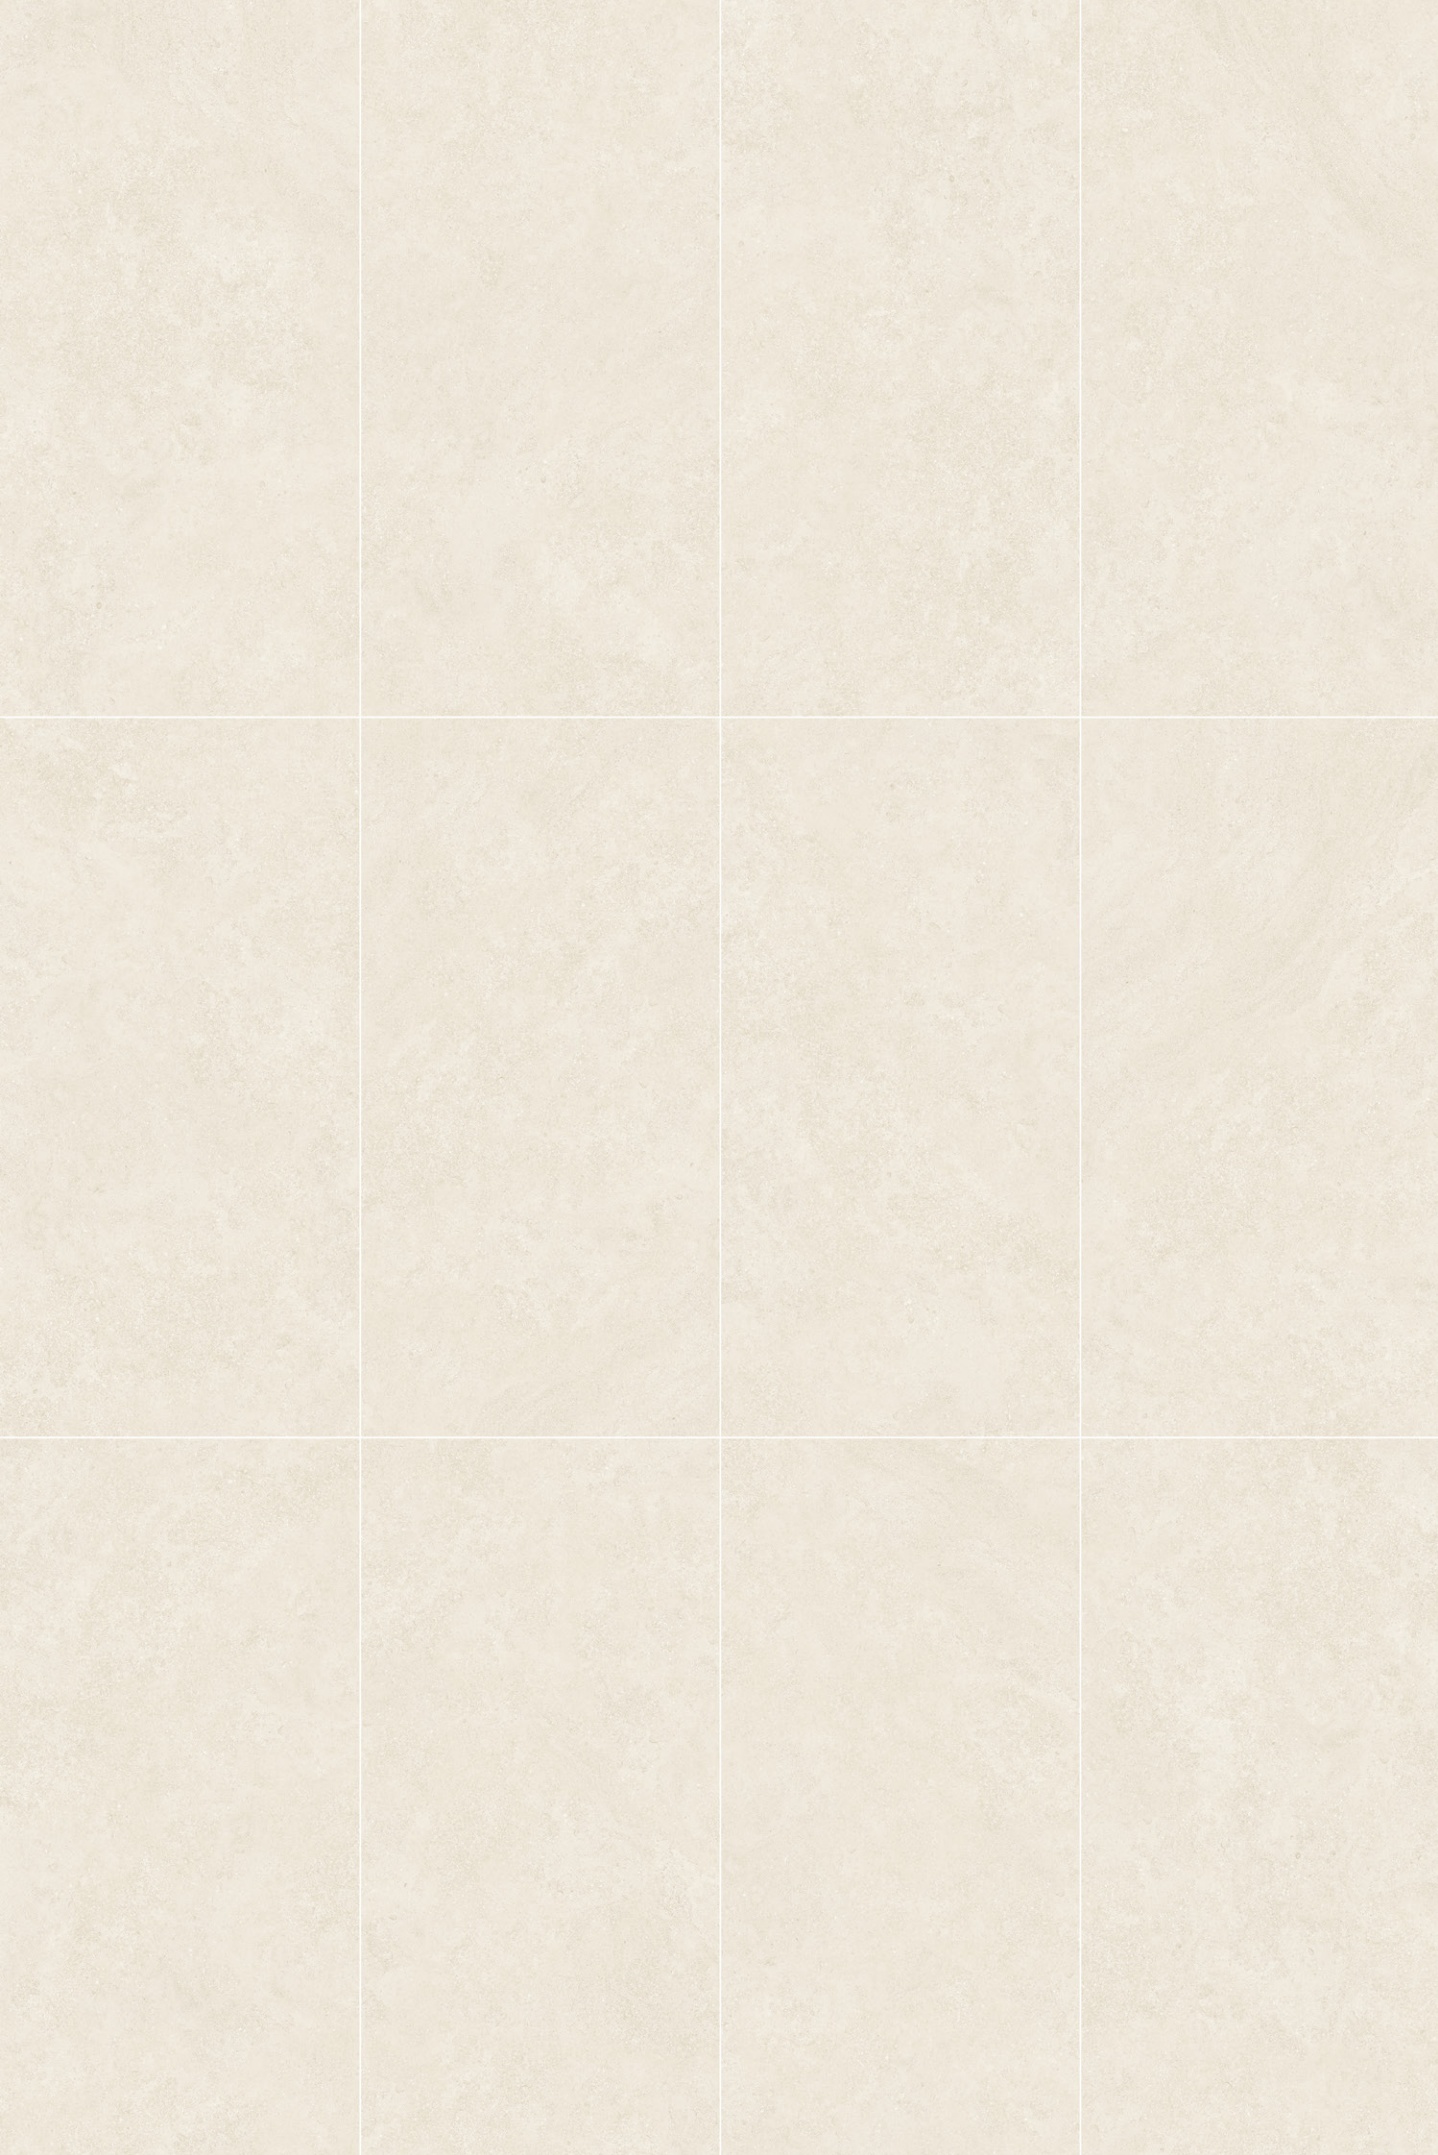

# 12

600x1200mm  
PATTERNS

**Size:**  
600x1200mm

**Finishes:**  
Matt



# 24

600x600mm  
PATTERNS

**Size:**  
600x600mm

**Finishes:**  
Matt/External





# Limestone Pearl




**Size:**

300x300mm / 300x600mm  
600x600mm / 600x1200mm

**Finishes:**

Matt/External

**Thickness:**



9mm



600x1200mm

Matt



600x600mm

Matt/External



300x300mm

Matt



300x600mm

Matt/External



# 12

600x1200mm  
PATTERNS

**Size:**  
600x1200mm

**Finishes:**  
Matt



# 24

600x600mm  
PATTERNS


**Size:**  
600x600mm

**Finishes:**  
Matt/External





# Matt

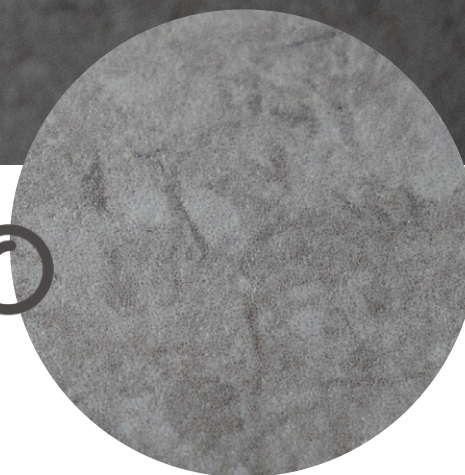



**External**



# Colours



Luna



Bottacino



Pearl

| SIZE AND THICKNESS |                  |                  |                  |                   |
|--------------------|------------------|------------------|------------------|-------------------|
| SURFACE            | 300x300mm<br>9mm | 300x600mm<br>9mm | 600x600mm<br>9mm | 600x1200mm<br>9mm |
| MATT               | ●                | ●                | ●                | ●                 |
| EXTERNAL           |                  | ●                | ●                |                   |

## TECHNICAL FEATURES

| TECHNICAL FEATURES             |                                             | TEST METHOD     | STANDARD                                                                                                                   | MANUFACTURERS VALUES     |
|--------------------------------|---------------------------------------------|-----------------|----------------------------------------------------------------------------------------------------------------------------|--------------------------|
| DIMENSIONS AND SURFACE QUALITY |                                             |                 |                                                                                                                            |                          |
| LENGTH AND WIDTH               |                                             | EN ISO 10545–2  | ±0.6%                                                                                                                      | ±0.1%                    |
| THICKNESS                      |                                             | EN ISO 10545–2  | ±5%                                                                                                                        | ±3%                      |
| SURFACE QUALITY                |                                             | EN ISO 10545–2  | A minimum of 95% of the tiles shall be free from visible defects that would impair the appearance of a major area of tiles | 100%                     |
| PHYSICAL PROPERTIES            |                                             |                 |                                                                                                                            |                          |
| WATER ABSORPTION               |                                             | EN ISO 10545–3  | E ≤ 3 %                                                                                                                    | E ≤ 0.7%                 |
| BREAKING STRENGTH              |                                             | EN ISO 10545–4  | ≥ 1300N                                                                                                                    | ≥ 1300N                  |
| MODULUS OF RUPTURE             |                                             | EN ISO 10545–4  | ≥ 35Mpa                                                                                                                    | ≥ 35Mpa                  |
| ABRASION RESISTANCE            |                                             | EN ISO 10545–7  | Report abrasion class and cycles passed                                                                                    | Class 4                  |
| THERMAL SHOCK RESISTANCE       |                                             | EN ISO 10545–9  | No crazing or peeling after testing                                                                                        | No crazing and peeling   |
| CRAZING RESISTANCE             |                                             | EN ISO 10545–11 | No crazing on glazed surface after testing                                                                                 | No crazing               |
| FROST RESISTANCE               |                                             | EN ISO 10545–12 | No crazing or peeling after testing                                                                                        | No crazing and peelingww |
| CHEMICAL PROPERTIES            |                                             |                 |                                                                                                                            |                          |
| STAIN RESISTANCE               |                                             | EN ISO 10545–14 | ≥ Class 3                                                                                                                  | Class 5                  |
| CHEMICAL RESISTANCE            | Low concentration acids & alkalis           | EN ISO 10545–13 | GLA, GLB, GLC                                                                                                              | GLA                      |
|                                | High concentration acids & alkalis          |                 | GHA, GHB, GHC                                                                                                              | GHA                      |
|                                | Household chemicals and swimming pool slats |                 | Minimum GB                                                                                                                 | GA                       |