

ORNAMENT
MARBLE
CEMENT
STONE
WOOD
OPUS



CAPRI



ORNAMENT
MARBLE
CEMENT
STONE
WOOD
OPUS
■
CAPRI




Harmonious, meticulously detailed surfaces
with impressive technical and aesthetic
properties: we design floor and wall
coverings, not tiles.

CAPRI


CAPRI came to life after a long search and after many attempts to mix three stones of different nature. In the end we managed to find the right mix: the Italian Collemantina marble, the French Imperiale marble and the slate from the Trentino-Alto-Adige Alps.



THICKNESS 2



FORMATS 4

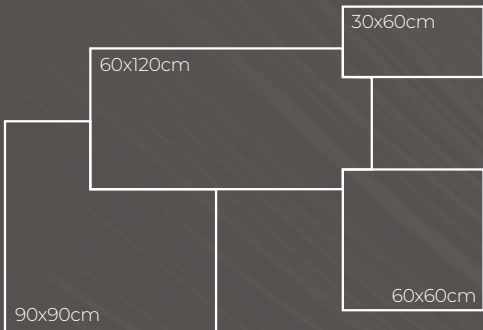



The company's mastery of production processes and extensive research and development take its products beyond all expectations, towards an aesthetic ideal that is always up-to-date, realized in collections that defy fashion, synonymous with beauty that continues to express itself over time.

COLOURS 5



SURFACES 4

IN & OUT – SURFACETEC
Matt (90 x 90CM)
Lappato
Pavers grip

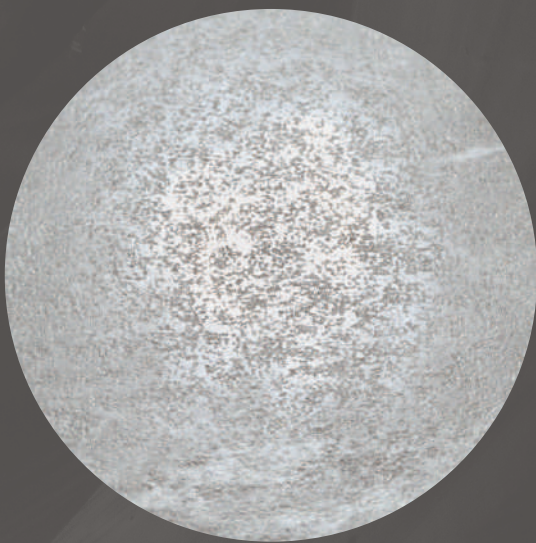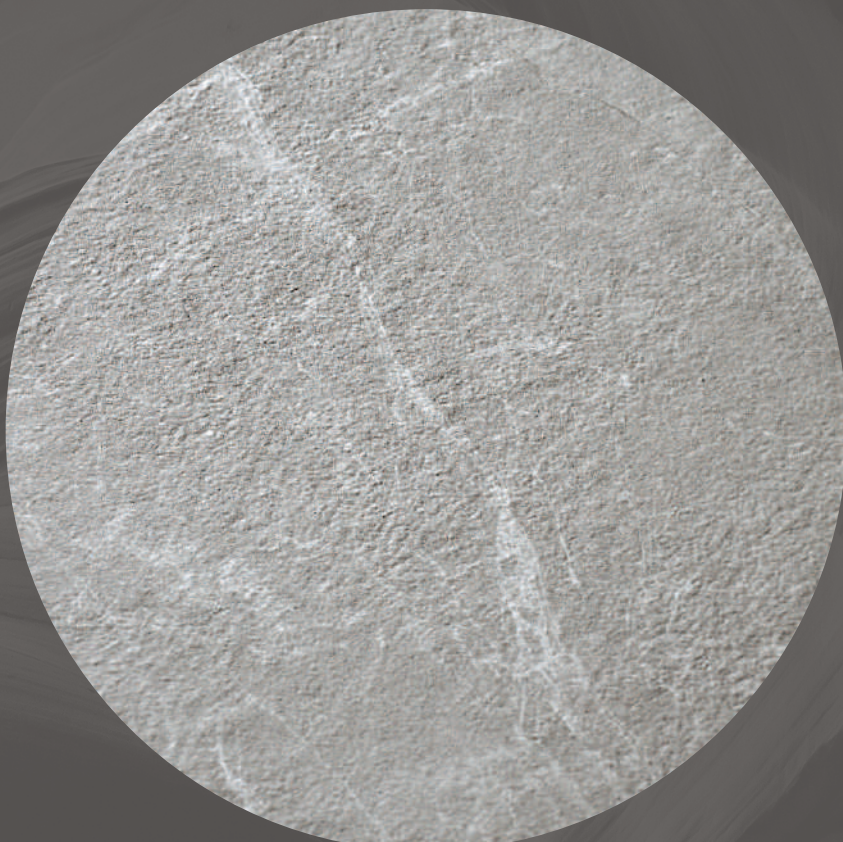

CAPRI GLACIER



▲ 30 x 60CM

◀ 60 x 120CM

▼ 60 x 60CM

▲ 90 x 90CM



TUMBLLED EDGE MOSAIC
29.8 x 32.7CM



TUMBLLED EDGE SUBWAY
10 x 20CM



2CM PAVER
▲ 60 x 60CM
■ 2CM



Pencil Edge Bullnose
▲ 40 x 60CM
■ 2CM





WALL: **TUMBLLED EDGE SUBWAY** 10 x 20CM



FLOOR: **GLACIER** 30 x 60CM 60 x 60CM



WALL: GLACIER 20x120CM 60x120CM **FLOOR: GLACIER** 60x120CM



FLOOR: GLACIER 90x90CM

CAPRI SALT



▲ 30 x 60CM


◄ 60 x 120CM

▼ 60 x 60CM

▲ 90 x 90CM



TUMBLED EDGE MOSAIC
29.8 x 32.7CM



TUMBLED EDGE SUBWAY
10 x 20CM



2CM PAVER
▲ 60 x 60CM
■ 2CM



Pencil Edge Bullnose
▲ 40 x 60CM
■ 2CM





FLOOR: SALT 60x60CM



FLOOR: SALT 60x120CM



WALL: TUMBLED EDGE MOSAIC 29.8 x 32.7CM FLOOR: SALT 90 x 90CM

CAPRI
SALT



WALL: TUMBLED EDGE SUBWAY 10 x 20CM



CAPRI
NUTMEG



▲ 30 x 60CM

◄ 60 x 120CM

▼ 60 x 60CM

▲ 90 x 90CM



TUMBLED EDGE MOSAIC
29.8 x 32.7CM



TUMBLED EDGE SUBWAY
10 x 20CM



2CM PAVER
▲ 60 x 60CM
■ 2CM



Pencil Edge Bullnose
▲ 40 x 60CM
■ 2CM

CAPRI
NUTMEG



FLOOR: TUMBLED EDGE MOSAIC 29.8 x 32.7CM



WALL/FLOOR: NUTMEG 60 x 120CM



FLOOR: NUTMEG 90 x 90CM



WALL: TUMBLED EDGE SUBWAY 10 x 20CM FLOOR: NUTMEG 60 x 60CM

CAPRI EARL GREY



▲ 90 x 90CM



▲ 30 x 60CM

◄ 60 x 120CM

▼ 60 x 60CM



TUMBLLED EDGE MOSAIC
29.8 x 32.7CM



TUMBLLED EDGE SUBWAY
10 x 20CM



2CM PAVER
▲ 60 x 60CM
■ 2CM



Pencil Edge Bullnose
▲ 40 x 60CM
■ 2CM







Slate is the strong and gritty component, an iconic and layered stone that we used to form the basis of the project. To enrich the design we have integrated the defined and elegant veins of the Collemantina in the foreground and later the complex and elaborate grid of the fine veins of the Imperiale.







CAPRI PEPPER




▲ 30 x 60CM

◀ 60 x 120CM

▼ 60 x 60CM

▲ 90 x 90CM




TUMBLLED EDGE MOSAIC
29.8x32.7CM



TUMBLLED EDGE SUBWAY
10x20CM



2CM PAVER
▲ 60 x 60CM
■ 2CM

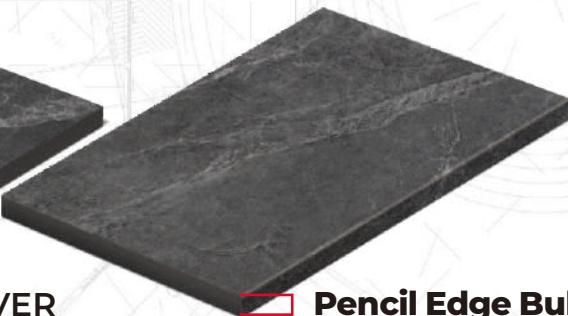

Pencil Edge Bullnose
▲ 40 x 60CM
■ 2CM





FLOOR: PEPPER 90 x 90CM



WALL: TUMBLLED EDGE SUBWAY 10 x 20CM

WALL: PEPPER 30 x 7.5CM

CAPRI PEPPER





FLOOR: PEPPER 60 x 60CM



FLOOR: PEPPER 60 x 120CM WALL: TUMBLED EDGE MOSAIC 29.8 x 32.7CM



CAPRI **IN & OUT SURFACETEC**

We build on its many years of expertise in the field of research and production of ceramic materials, and constant interaction with architects, designers and consumers, offering them a mature and stable surface technology with innovative and highly advanced features.



Pencil Edge Bullnose
40x60cm
2cm





FLOOR: NUTMEG 60 x 60 x 2CM

SURFACETEC
In/Out Solutions



FLOOR: NUTMEG 60 x 60 x 2CM



SURFACETEC[®]
In/Out Solutions



Pencil Edge Bullnose
40 x 60CM
2cm



FLOOR: EARL GREY 60 x 60 x 2CM



TECHNICAL SPECIFICATIONS

TECHNICAL CHARACTERISTIC	STANDARD TEST METHOD	PRESCRIBED VALUES	MANUFACTURER'S VALUES
MEASUREMENT & SURFACE APPEARANCE			
LENGTH	EN ISO 10545-2	±0.6%	±0.1%
WIDTH	EN ISO 10545-2	±0.6%	±0.1%
THICKNESS	EN ISO 10545-2	±5%	±3%
TRANSMUTATION	EN ISO 10545-2	±0.5%	±0.2%
PHYSICAL PROPERTIES			
WATER ABSORPTION	EN ISO 10545-3	≤0.5%	≤0.5%
BREAKING STRENGTH	EN ISO 10545-4	≥1300N	≥1300N
MODULUS OF RUPTURE	EN ISO 10545-4	≥35N/mm²	≥35N/mm²
RESISTANCE TO ABRASION	EN ISO 10545-7	≤205mm³	≤160mm³
SLIP RESISTANCE, WET PENDULUM TEST METHOD, SLIDER 96	AS 4586-2013/AMDT1-2017 APPENDIX A	N/A	P4
CHEMICAL PROPERTIES			
RESISTANCE TO CHEMICALS RESISTANCE TO HOUSEHOLD CHEMICALS AND SWIMMING POOL SALTS	EN ISO 10545-13	MINIMUM GB	PASS
RESISTANCE TO STAINING	EN ISO 10545-14 when subjected to chemicals	MINIMUM CLASS 3	PASS

PACKING SPECIFICATIONS

SERIES	SIZES	PCS / CTN	M² / CTN	M² / PLT	CTN / PLT	KG / PLT
CAPRI	60X120CM	2	1.44	57.6	40	1360
	90X90CM	2	1.62	64.8	40	1520
	60X60CM	4	1.44	57.6	40	1240
	30X60CM	8	1.44	57.6	40	1240
	30X30CM	11	0.99	55.44	56	1232
	60X60X2CM	2	0.72	28.8	40	1280
	40X60X2CM	2	0.48	30.72	60	1440



There is no denying the grandeur of stone. Be inspired by our collection of stone designs, exclusively created to bring elegance and beauty to your home.

