

EDISON SERIES

EDISON showcases neutral movement in a curated colour palette of white, cream and grey. From clean, sophisticated interior walls and floors to spacious alfresco entertaining and poolside settings, **EDISON** is ideal for elevating a seamless lifestyle of contemporary living. Available in crazy pave, tiles, and pavers.



PRODUCT TYPE: Glazed porcelain

COLOURS: Cotton, Cashmere and Alpaca

SIZES: 300x300mm, 300x600mm,
400x600x20mm, 600x600mm,
600x600x20mm, 600x1200mm &
1100x1290x9mm
Rectified Edges

FINISHES/USAGE:

Matt & Grip/Wall & Floor


AESTHETIC QUALITIES:

Effortlessly modern & refined

TECHNICAL DATA:

P3 Pendulum Slip rating (Matt)
P5 Pendulum Slip rating (Grip)
More technical data on last page

VARIATION:



V2

EDISON SERIES

PRODUCT INFORMATION



Cotton

Matt	300x300mm 300x600mm 600x600mm 600x1200mm
Grip	600x600mm
Grip Paver	600x600x20mm
Grip Coping	400x600x20mm



EDISON SERIES

PRODUCT INFORMATION



Cashmere

Matt	300x300mm 300x600mm 600x600mm 600x1200mm
Grip	600x600mm
Grip Paver	600x600x20mm
Grip Coping	400x600x20mm



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

EDISON SERIES

PRODUCT INFORMATION



Alpaca

Matt	300x300mm 300x600mm 600x600mm 600x1200mm
Grip	600x600mm
Grip Paver	600x600x20mm
Grip Coping	400x600x20mm



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

EDISON SERIES

CRAZY PAVE PRODUCT INFORMATION



Cotton

Matt	1100x1290x9mm
Grip	1100x1290x9mm




Cashmere

Matt	1100x1290x9mm
Grip	1100x1290x9mm



Alpaca

Matt	1100x1290x9mm
Grip	1100x1290x9mm

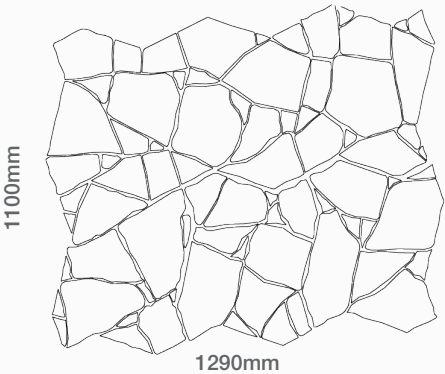

Please note: Crazy Pave is available as a set comprised of 6 sheets. Each sheet size is approximately 479x594mm. In total, the entire set measures 1100mmx1290x9mm and a surface area of 1.42 square metres. Please refer to the drawing on the left for reference.



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

EDISON SERIES



Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

EDISON SERIES

PAVER COPING 400x600x20mm



Cotton

Grip

400x600x20mm



Cashmere

Grip

400x600x20mm




Alpaca

Grip

400x600x20mm

Edison Paver Coping Diagram

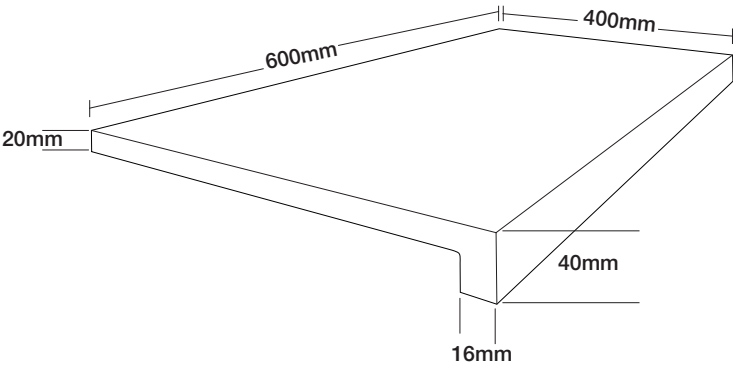

Our one-piece paver copings are designed with a clean drop edge, offering a durable and seamless finish for outdoor pool surrounds, landscaped settings and more.

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

EDISON SERIES

COTTON VARIATION



EDISON SERIES

CASHMERE VARIATION



EDISON SERIES

ALPACA VARIATION



EDISON SERIES

TECHNICAL DATA-TILE

	technical characteristics	test method	required values	result
	water absorption	ISO 10545-3	≤0.5%	≤0.08%
	breaking strength	ISO 10545-4	≥1300N	2573
	bending strength	ISO 10545-4	≥35N/mm2	52.8
	chemical resistance	ISO 10545-13	Minimum GB	GA
	staining resistance	ISO 10545-14	Minimum Class 3	class 5




Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.

EDISON SERIES

Important: When installing Edison Paver Coping tile, the underside and 16mm drop edge must be adhered to the substrate.

When applying full adhesion to paver coping, it is essential to ensure proper surface preparation, including cleaning and drying the surfaces to be bonded. The installer shall ensure that all porcelain pavers and coping are installed in accordance with the applicable Australian Standards and the adhesive manufacturer's instructions. The adhesive used should be appropriate for the materials being bonded and should be applied according to the manufacturer's instructions. Full adhesion can provide a strong and durable bond between the coping pavers and the substrate.

Paver coping is not suggested for fiberglass pools due to potential issues with flexibility, weight, compatibility, and installation challenges.

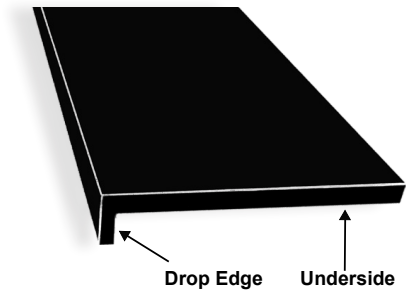

TECHNICAL DATA- PAVER

	technical characteristics	test method	required values	result
	water absorption	ISO 10545-3	≤0.5%	≤0.04%
	breaking strength	ISO 10545-4	-	11427
	bending strength	ISO 10545-4	-	45.60
	chemical resistance	ISO 10545-13	Minimum GB	GA
	staining resistance	ISO 10545-14	Minimum Class 3	class 5

Variation is an inherent property of tiles and stone. Sizes are nominal and may include a joint.